



buried up-lights

Mounting: buried in ground
Housing: die-cast powder coated aluminum
Trim: stainless steel 1.4401 (SUS316)
Reflector: adjustable and rotatable highly reflective aluminum
Diffuser: 10 mm clear safety glass
Gasket: molding shaped rubber seal

LED: COB
CRI: Ra>80
CCT:
 CT27-2700K/CT30-3000k
 CT40-4000k/CT50-5000k
 CT60-6000k
Note: *Other CRI/CCT available on request
 * Lumen data is based on 3000K

LED driver: integral constant current
Volt AC: 100-240V
Frequency: 50/60Hz
 ND - non-dimmable
 PH - phase dimmable
 010V - 0-10V dimmable
 DALI - compatible



Application:
 outdoors
 floors/decks/pathways
 landscapes
 building facades
Ambient Temp: -35°~+55°C







Ref Code	Watt	Lm(±)
24.45.053.01.12	12W	1250
24.45.053.02.15	15W	1550



Beam Angle-Code:
 15°-BA15
 24°-BA24
 50°-BA50
 20°x55°-BA2055



Mounting box: ABS

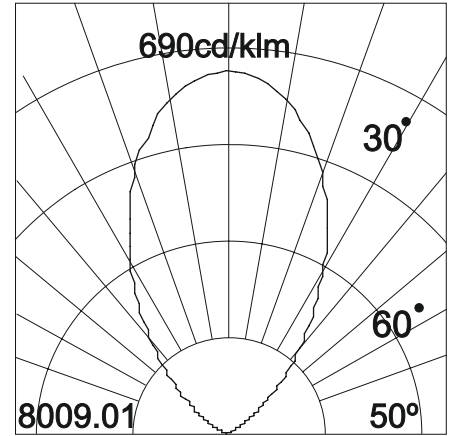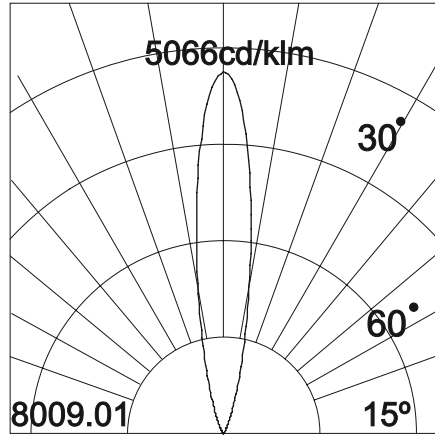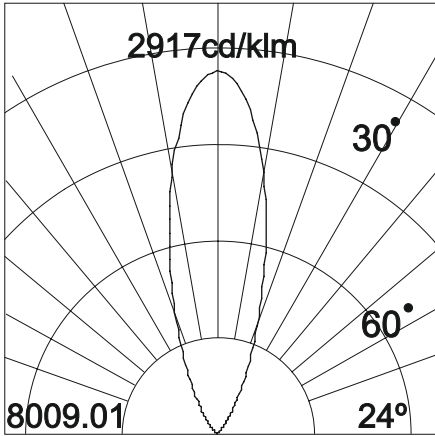

Note:
 * The IP68 version should be used primarily under water only to avoid over-heating and damaging LED chips.
 * The IP68 version should not be used with integral driver.